
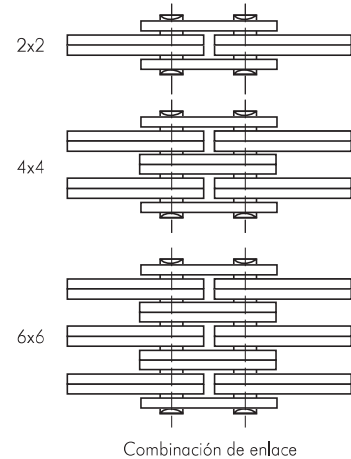


ANSI CADENA TIPO FLEYER

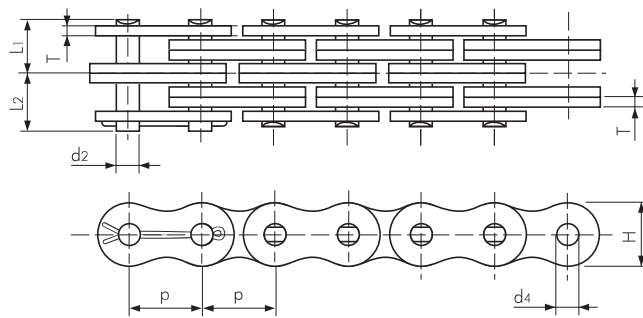

Tipo AL

Dimensiones en mm

Cadena TSUBAKI n°.	Paso p	Combinación de enlace LC	Perno			Placa			Carga de rotura mín. según Tsubaki kN	Masa aprox. kg/m
			Diámetro d2	Longitud L1	Longitud L2	Grosor T	Altura H (máx.)	Orificio Diámetro d4		
AL 422	12,70 (1/2")	2 x 2	3,96	4,20	5,30	1,50	10,40	4,02	16,7	0,38
AL 444		4 x 4		7,43	8,52				33,3	0,74
AL 466		6 x 6		10,65	11,75				50,5	1,10
AL 522	15,875 (5/8")	2 x 2	5,08	5,43	6,97	2,00	13,00	5,13	27,5	0,62
AL 544		4 x 4		9,68	11,22				54,9	1,22
AL 566		6 x 6		13,90	15,45				82,4	1,81
AL 622	19,05 (3/4")	2 x 2	5,94	6,33	8,22	2,40	15,60	6,00	38,2	0,87
AL 644		4 x 4		11,28	13,17				76,5	1,71
AL 666		6 x 6		16,23	18,12				115,0	2,54
AL 822	25,40 (1")	2 x 2	7,90	8,18	10,97	3,20	20,80	7,97	64,7	1,51
AL 844		4 x 4		14,90	17,70				129,0	2,98
AL 866		6 x 6		21,60	24,40				194,0	4,44
AL 1022	31,75 (1 1/4")	2 x 2	9,48	10,03	13,22	4,00	26,00	9,57	98,1	2,69
AL 1044		4 x 4		18,35	21,55				196,0	5,31
AL 1066		6 x 6		26,65	29,85				294,0	7,93
AL 1222	38,10 (1 1/2")	2 x 2	11,04	12,10	15,80	4,80	31,20	11,14	141,0	3,57
AL 1244		4 x 4		22,00	25,70				282,0	7,07
AL 1266		6 x 6		31,93	35,62				424,0	10,56
AL 1444	44,45 (1 3/4")	4 x 4	12,64	25,65	30,15	5,60	36,40	12,74	373,0	10,34
AL 1466		6 x 6		37,28	41,77				559,0	15,16
AL 1644		4 x 4		29,03	34,02	6,40	41,60	14,32	471,0	12,98
AL 1666	50,80 (2")	6 x 6	14,21	42,23	47,22				706,0	19,41

Nota:

1. Para obtener más información acerca de los terminales y las poleas póngase en contacto con Tsubaki.